

HEAT-SHRINKABLE MV INDOOR TERMINATIONS FOR SINGLE CORE POLYMERIC CABLES WITH Cu WIRE OR TAPE SCREEN, WITH OR WITHOUT ARMOUR
Up to 19/33 (36) kV

Application

The "MONOi" terminations are a single component solution, for single core polymeric cables with or without armour.

Technical description

The "MONOi" indoor terminations are designed for maximum system voltages of 36kV, for compact switchgear as well as for installations where space is limited.



Easy and quick to install, reducing installation time and errors.
The kit consists of a stress control mastic strip, a co-extruded dual wall tube and red anti tracking sealing mastic.

Add on kit for armoured cables are available separately.




Type tested acc.:
Cenelec HD 629.1 S2
IEC 60502-4


Um kV	Type	Application range (mm ²)	L (mm)
12	12MONOi1.95	16-95	300
12	12MONOi1.240	70-240	300
12	12MONOi1.400	185-400	350
12	12MONOi1.630	400-630	350
12	12MONOi1.1000	630-1000	400
12	12MONOi1.1200	800-1200	400
24	24MONOi1.95	35-95	350
24	24MONOi1.240	70-240	350
24	24MONOi1.400	185-400	400
24	24MONOi1.630	400-630	400
24	24MONOi1.1000	630-1000	400
24	24MONOi1.1200	800-1200	450
36	36MONOi1.95	50-95	450
36	36MONOi1.240	70-240	450
36	36MONOi1.400	185-400	450
36	36MONOi1.630	400-630	500
36	36MONOi1.1000	630-1000	500
36	36MONOi1.1200	800-1200	500

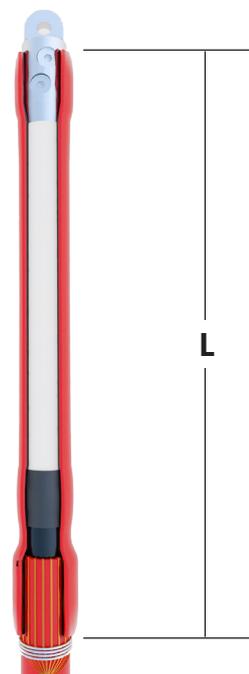

For cables with lead screen please contact our sales office




Please add "MT" at the end of the product code for cables with Cu tape screen




Earth kit included for cables with wire screens




For other cable types please contact our sales office




Trifurcating kits "TK" available separately. Please see available sizes of specific catalogue page



Various earth connection solutions exist for armoring. For exact details please contact our sales office



Design accommodates various lug types



Various earth connection kits are available for screen connection. For exact details please contact our sales office

HEAT-SHRINKABLE MV OUTDOOR TERMINATIONS FOR SINGLE CORE POLYMERIC CABLES WITH Cu WIRE OR TAPE SCREEN, WITH OR WITHOUT ARMOUR
Up to 19/33 (36) kV

Application

The "MONOe" terminations are a single component solution, for single core polymeric cables with or without armour.

Technical description

The "MONOe" outdoor terminations are designed for maximum system voltages of 36kV.


Easy and quick to install, reducing installation time and errors.
The kit consists of a stress control mastic strip, a co-extruded dual wall tube, red anti tracking sealing mastic and anti tracking rain sheds.

Add on kit for armoured cables are available separately.




Type tested acc.:
Cenelec HD 629.1 S2
IEC 60502-4


Um kV	Type	Application range (mm ²)	L (mm)
12	12MONOe1.95	16-95	500
12	12MONOe1.240	70-240	500
12	12MONOe1.400	185-400	500
12	12MONOe1.630	400-630	500
12	12MONOe1.1000	630-1000	500
12	12MONOe1.1200	800-1200	500
24	24MONOe1.95	35-95	500
24	24MONOe1.240	70-240	500
24	24MONOe1.400	185-400	500
24	24MONOe1.630	400-630	600
24	24MONOe1.1000	630-1000	600
24	24MONOe1.1200	800-1200	600
36	36MONOe1.95	50-95	550
36	36MONOe1.240	70-240	550
36	36MONOe1.400	185-400	650
36	36MONOe1.630	400-630	650
36	36MONOe1.1000	630-1000	650
36	36MONOe1.1200	800-1200	650

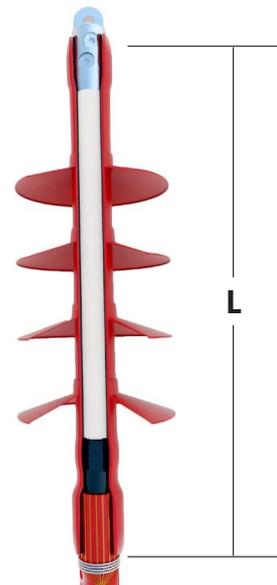


Designed for outdoor applications



For cables with lead screen please contact our sales office



Please add "MT" at the end of the product code for cables with Cu tape screen




Earth kit included for cables with wire screens




For other cable types please contact our sales office



Trifurcating kits "TK" available separately. Please see available sizes of specific catalogue page



Various earth connection solutions exist for armoring. For exact details please contact our sales office



Design accommodates various lug types



Various earth connection kits are available for screen connection. For exact details please contact our sales office