

HEAT-SHRINKABLE MV INDOOR TERMINATIONS FOR THREE CORE POLYMERIC CABLES WITH Cu WIRE OR TAPE SCREEN, WITH OR WITHOUT ARMOUR
Up to 12/24/36kV

Application


The "MONOI" terminations are a single component solution, for three core polymeric cables with or without armour.

Technical description



The "MONOI" indoor terminations are designed for maximum system voltages of 36kV, for compact switchgear as well as for installations where space is limited.

Easy and quick to install, reducing installation time and errors.
The kit consists of a stress control mastic strip, a co-extruded dual wall tube and red anti tracking sealing mastic.


Add on kit for armored cables are available separately.

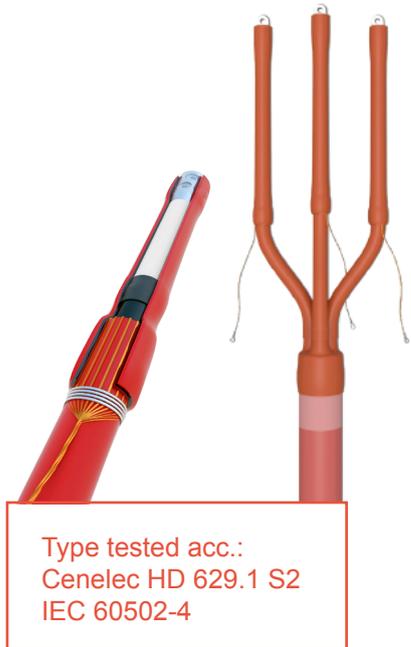


Um kV	Type	Application range (mm ²)	L (mm)
12	12MONOI3.95	16 ÷ 95	300
12	12MONOI3.240	70 ÷ 240	300
12	12MONOI3.400	185 ÷ 400	350
12	12MONOI3.500	400 ÷ 500	350
24	24MONOI3.95	35 ÷ 95	350
24	24MONOI3.240	70 ÷ 240	350
24	24MONOI3.400	185 ÷ 400	400
24	24MONOI3.500	400 ÷ 500	400
36	36MONOI3.95	50 ÷ 95	450
36	36MONOI3.240	70 ÷ 240	450
36	36MONOI3.400	185 ÷ 400	450
36	36MONOI3.500	400 ÷ 500	500

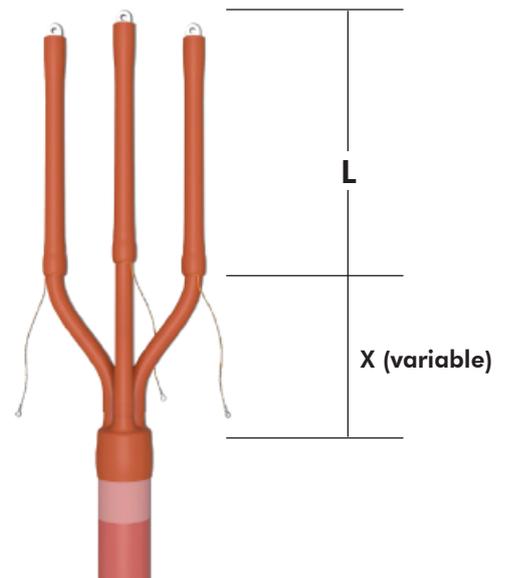

For cables with lead screen please contact our sales office




Please add "MT" at the end of the product code for cables with Cu tape screen




Earth kit included for cables with wire screens




For other cable types please contact our sales office




Trifurcating kits "TK" available separately. Please see available sizes of specific catalogue page



Various earth connection solutions exist for armoring. For exact details please contact our sales office



Design accommodates various lug types



Various earth connection kits are available for screen connection. For exact details please contact our sales office

HEAT-SHRINKABLE MV OUTDOOR TERMINATIONS FOR THREE CORE POLYMERIC CABLES WITH Cu WIRE OR TAPE SCREEN, WITH OR WITHOUT ARMOUR

Up to 19/33 (36) kV

Application


The "MONOe" terminations are a single component solution, for three core polymeric cables with or without armour.

Technical description

The "MONOe" outdoor terminations are designed for maximum system voltages of 36kV.


Easy and quick to install, reducing installation time and errors. The kit consists of a stress control mastic strip, a co-extruded dual wall tube, red anti tracking sealing mastic and anti tracking rain sheds.

Add on kit for armoured cables are available separately.

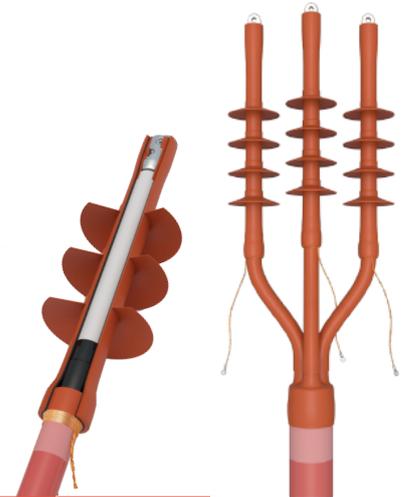

Type tested acc.:
Cenelec HD 629.1 S2
IEC 60502-4

Um kV	Type	Application range (mm ²)	L (mm)
12	12MONOe3.95	50÷95	500
12	12MONOe3.240	70÷240	500
12	12MONOe3.400	185÷400	500
12	12MONOe3.500	400÷500	500
24	24MONOe3.95	35÷95	500
24	24MONOe3.240	70÷240	500
24	24MONOe3.400	185÷400	500
24	24MONOe3.500	400÷500	600
36	36MONOe3.95	50÷95	550
36	36MONOe3.240	70÷240	550
36	36MONOe3.400	185÷400	650
36	36MONOe3.500	400÷500	650

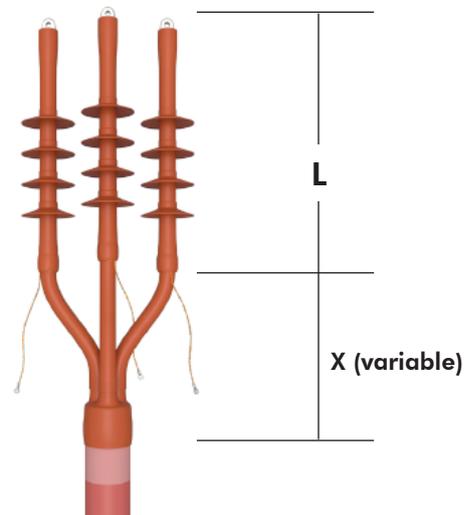

Designed for outdoor applications	For cables with lead screen please contact our sales office	Please add "MT" at the end of the product code for cables with Cu tape screen	Earth kit included for cables with wire screens	For other cable types please contact our sales office	Trifurcating kits "TK" available separately. Please see available sizes of specific catalogue page	Various earth connection solutions exist for armoring. For exact details please contact our sales office	Design accommodates various lug types	Various earth connection kits are available for screen connection. For exact details please contact our sales office